


# 短节距精密滚子链链轮

## Short pitch precision roller chain wheels

3/4"×7/16" 12B-1-2-3 GB1244-1997 DIN8187 ISO/R606		链轮齿部参数MM		
		节距 P	19.05	
		滚子直径 d-φ	12.07	
		元弧半径 r3	19	
		倒角宽度 C	2	
		齿宽 B1	11.1	
		齿宽 b1	10.8	
		齿宽 B2	30.3	
		齿宽 B3	49.78	

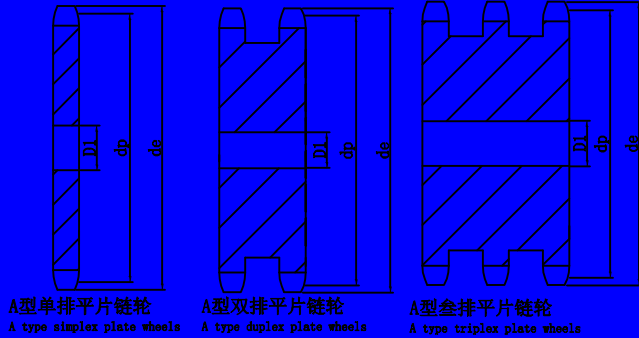

齿数 Z	外径 de	节径 dp	单排链轮 Simplex			双排链轮 Duplex			叁排链轮 Triplex		
			dm	D1	A	dm	D2	A	dm	D3	A
8	57.6	49.78	31	12	30	31	12	45	31	16	65
9	62	55.7	37	12	30	37	12	45	37	16	65
10	69	61.64	42	12	30	42	12	45	42	16	65
11	75	67.61	46	14	35	47	16	50	47	20	70
12	81.5	73.61	52	14	35	53	16	50	53	20	70
13	87.5	79.59	58	14	35	59	16	50	59	20	70
14	93.6	85.61	64	14	35	65	16	50	65	20	70
15	99.8	91.63	70	14	35	71	16	50	71	20	70
16	105.5	97.65	75	16	35	77	20	50	77	20	70
17	111.5	103.67	80	16	35	83	20	50	83	20	70
18	118	109.71	80	16	35	89	20	50	89	20	70
19	124.2	115.75	80	16	35	95	20	50	95	20	70
20	129.7	121.78	80	16	35	100	20	50	100	20	70
21	136	127.82	90	20	40	100	20	50	100	20	70
22	141	133.86	90	20	40	100	20	50	100	20	70
23	149	139.9	90	20	40	110	20	50	110	20	70
24	153.9	145.94	90	20	40	110	20	50	110	20	70
25	160	152	90	20	40	120	20	50	120	20	70
26	165.9	158.04	95	20	40	120	20	50	120	20	70
27	172.3	164.09	95	20	40	120	20	50	120	20	70
28	178	170.13	95	20	40	120	20	50	120	20	70
29	184.1	176.19	95	20	40	120	20	50	120	20	70
30	190.5	182.25	95	20	40	120	20	50	120	20	70
31	196.3	188.31	95	20	40	120	20	50	130	25	70
32	203.3	194.35	95	20	40	120	20	50	130	25	70
33	209.3	200.4	95	20	40	120	20	50	130	25	70
34	214.6	206.46	95	20	40	120	20	50	130	25	70
35	221	212.52	95	20	40	120	20	50	130	25	70
36	226.8	218.58	100	20	40	120	25	50	130	25	70
37	232.9	224.64	100	20	40	120	25	50	130	25	70
38	239	230.69	100	20	40	120	25	50	130	25	70
39	245.1	236.75	100	20	40	120	25	50	130	25	70
40	251.3	242.81	100	20	56	120	25	50	130	25	70
42	264.5	254.92	110	20	56	136	25	62	140	25	70
45	282.5	273.09	110	20	56	136	25	62	140	25	70
50	312.3	303.39	110	20	56	136	25	62	140	25	70
55	342.7	333.69	110	20	56	136	25	62	140	25	70
60	373	363.99	110	20	56	136	25	62	140	25	70

